


INCALZITOR CU GPL

BLP 27M



PRINCIU DE FUNCTIONARE

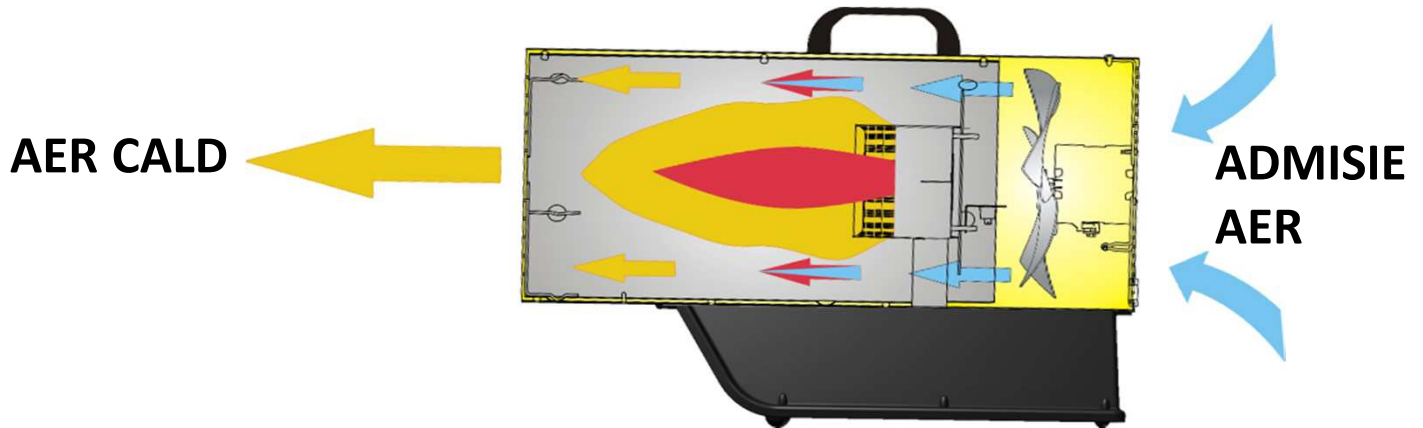

Incalzitoarele Master cu gaz (GPL) produc o cantitate mare de caldura instantanee. Ele sunt foarte economice, robuste si eficiente.

DATE TEHNICE

Capacitate	kW	27		
	kcal/h	23.200		
	Btu/h	92.200		
Debit de aer	m ³ /h	700	Alimentare curent	V
Greutate neta	kg	5	Frecventa	Hz
Greutate bruta	kg	6	Curentn absorbit	A
Combustibil		Propane Butane	Nivel de zgomot	dBa
Presiune alimentare gaz	mbar	1500 - 700	Clasa de protectie	IP44
Consum combustibil	kg/h	1,87	Diferenta de temperatura la 1.5 m	<70°C

AMBALARE

Dimensiuni ambalaj	mm	550 x 230 x 300
Dimensiuni incalzitor	mm	471 x 188 x 293


COMPONENTE

Aprindere	Manual piezoelectric
Electrod	Descarcare in arzator, cu un singur filament
Detectie flacara	Senzor cu termocupla
Sistem de siguranta	Termostat bimetalic lamelar
Duza	Ø 1 mm
Motor	Monofazat, cu protectie termica, sens de rotatie anti-orar, 2800 rpm
Transport	Cu ajutorul manerului de transport
Alimentare cu gaz	Robinet de gaz
Termostat de camera	Nu se poate lega la termostate

ACCESORII OPTIONALE

Termostat de camera	NU ESTE DISPONIBIL
---------------------	--------------------


SCHEMA ELECTRICA

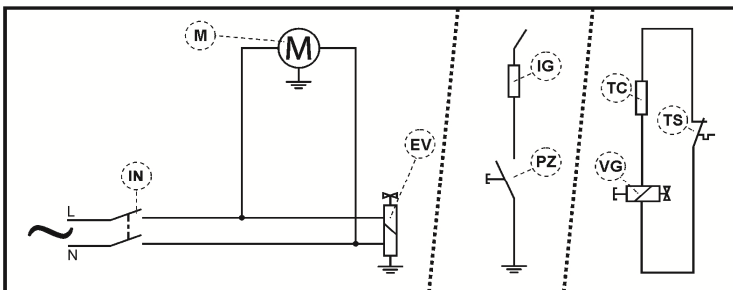

11 - 16 - 17M

IN	:	Intrerupator
M	:	Motor
EV	:	Electrovalva
IG	:	Electrod
PZ	:	Sistem piezoelectric
TC	:	Termocupla
VG	:	Electrovalva pentru gaz
TS	:	Termostat de siguranta

DIAGRAMA COMBUSTIBIL

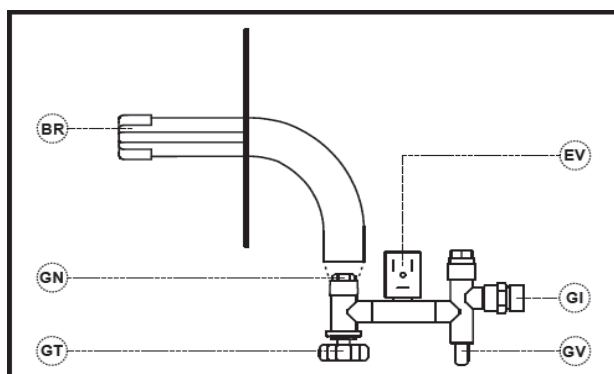

GI	:	Filet alimentare gaz
GV	:	Ventil gaz
EV	:	Electrovalva pentru gaz
GT	:	Robinet gaz
GN	:	Duza gaz
BR	:	Arzator